


MRP-Series



구분 / Item		사양 / Spec.		
		MRP15	MRP20	MRP30
중 량 Operating Weight	kg	1,250	1,800	2,450
	lb	2,755	3,970	5,400
전 장 Overall Length	mm	1,582	1,836	1,981
	Inch	62.28	72.28	77.99
전 폭 Overall Width	mm	1,217	1,430	1,541
	Inch	47.91	56.29	60.67
암 폭 Arm Width	mm	290	320	380
	Inch	11.42	12.59	14.96
벌 림 폭 Max. Opening Width	mm	720	850	1,050
	Inch	28.35	33.46	41.33
커터날 길이 Cutter Length	mm	150	200	200
	Inch	5.9	7.84	7.87
분쇄력 Crushing Force	ton (Front)	92	108	123
	ton Middle)	143	178	199
절단력Cutting Force	ton	206	270	286
작동 압력 Operating Pressure	kg/cm ²	270	300	320
	psi	3,804	4,267	4,550
작동 유량 Oil Flow Rate	LPM	170~200	200~250	250~300
	GPM	44.9~52.8	52.8~66.1	66.1~79.2
적용 장비 Suitable Excavator	ton	14 ~ 20	18 ~ 25	26 ~ 35
Speed-Up Valve		Option		

Distributor:

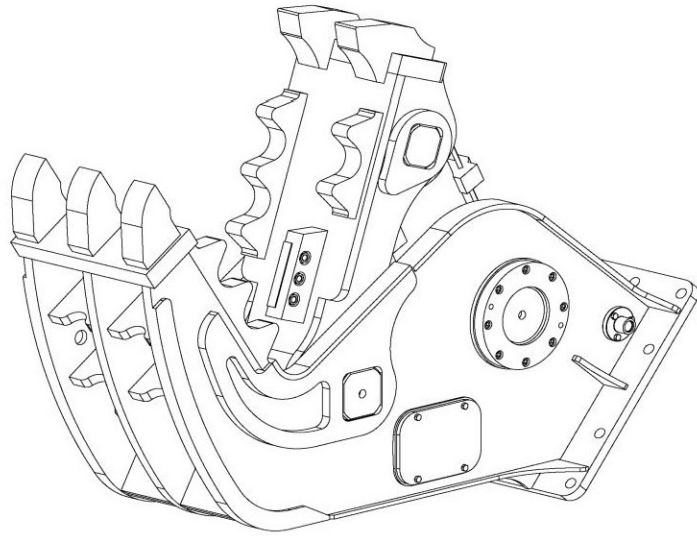

POWER RAM SDN BHD

No.: 21, Jalan Perindustrian 1/6, Taman Perindustrian Batu Caves, 68100 Batu Caves, Selangor.

Tel: +603-6186 8806 Fax: +603-6186 0337

Email: sales@powerram.my Website: www.powerram.my